



## GD6800EUV High Speed Multilayer Industrial Printer (I3200x6 )




### 3-layer printing technology for color conversion



The unique color + white + color printing mode provides consistent color performance with or without lighting. It works as alternative solution for double-sided printing and is suitable for light box applications with fine details

- High efficiency UV LED technology;
- Add a water-cooled constant temperature platform to ensure that the output screen is not wrinkled;
- International standard UV ink, alternative to weak solvent market, environmentally friendly and odorless;
- Industrial grade rack design, simple operation, stable output;
- Small volume and large production, saving office space, and strong productivity;
- Equipped with Antistatic device: make the printing picture more accurate.

Configured with Six i3200 printheads, 3.5pl ultra-small ink droplets

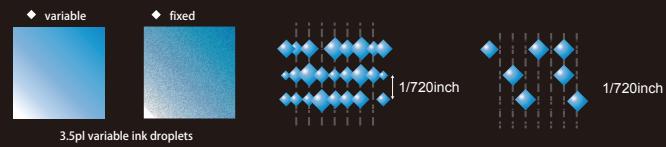

One machine with multiple uses, different color modes matching application solutions to meet the needs of different customers, can replace some high-end weak solvent machine markets, efficient and environmentally friendly!



Widely used in various materials: lamps, transparent films, car stickers, wallpaper, wall coverings, silk canvas and other advertising decoration materials.

## SPECIFICATIONS

Model	GD6800EUV	
Print Head	6pcs I3200-U1 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	8.3-72.8 in.(210-1850 mm)
	Thickness	Maximum 39 mil(1 mm)
	Outside Diameter	Maximum 8.3 in.(210 mm)
	Weight	Maximum 264.6 lb.(120 kg)
	Core Diameter	76.2mm (3in) /50.8mm (2in)
Printing Width	8.3-70.9 in.(210-1800 mm)	
Ink Cartridges	Type	UV Ink
	Ink Supply	Negative Pressure System + White Ink Stirring
	Color	CMYK+W
Printing Resolution	Maximum 2400 dpi	
Speed	CMYK Mode: 65 m <sup>2</sup> /h	CMYK+W+CMYK Mode: 30 m <sup>2</sup> /h
Ink Curing Unit	Dual UV LED Lamps	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Packaging Dimensions(with stand)	145.7(W)x37.4(D)x66.9(H) in. 3700(W) x 950(D) x 1700(H)mm	
Weight(with stand)	G.W: 1774.7 lb. (805 kg) N.W: 1543.2 lb. (700 kg)	
Environment	Power on	Temperature: 59 °F to 90°F (15 to 32°C) / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 °F to 104°F (15 to 40°C) / Humidity: 20 to 80% (no condensation)
Accessories	Bracket, Lighting Light Box, Large Ink Supply System, Waste Ink Bucket, Power Cord, Media Pressor, Flash Disk, RIP SoftwareUser, Manual, Etc	

## SHANGHAI GRANDO CO., LTD. & NANJING GRANDO CO., LTD.

Address: A1 Block, No.3802, Shengang Road, Songjiang District, Shanghai, China

No.9 Shengshui Road, Lishui Development Dist, Nanjing City, China

Tel: +86 021-57618188

Website: [www.grando-dg.com](http://www.grando-dg.com)